




Data sheet Lighting PR-B-006-3-SMA

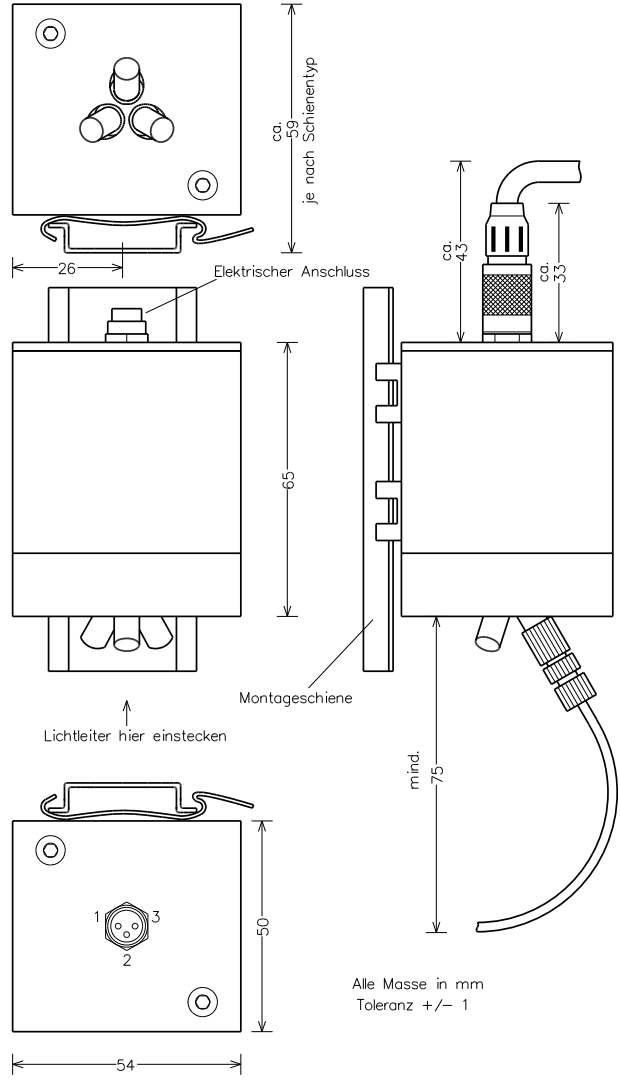

Tecnical data

Power supply	24V DC +10%/-5% from colour sensor
current	constant current control
Lghting	selections LED white
Anschluss	Binder Serie 711, 3 polig male
Pin connecting	Pin 1 -pulse, Pin 2 -24V DC Internal power supply, Pin 3 - 0V DC

Safety note: The lighting is equipped with a very intensive luminescent light source. Please avoid direct eye contact by all means, as this might lead to considerable impairment of vision!